

SOLAR INVERTERS

ABB string inverters

PVS-175-TL

*Preliminary



—
PVS-175-TL
three-phase outdoor
string inverter

High power density

This new high-power string inverter, with the largest high power density within the 1500 Vdc segment, delivers up to 185 kVA at 800 Vac and can achieve an ultra-high-power density of 1.3 kW/kg. This not only maximizes the ROI for ground-mounted utility-scale applications but also reduces Balance of System costs (i.e. AC side cabling) for small to large scale, free field ground mounted PV installations.

Design flexibility

The inverter comes equipped with 12 MPPT, the highest available in the market, assuring maximum PV plant design flexibility and increasing yields also in case of complex installations.

Installer friendly design

Quick and easy installation, thanks to plug and play connectors, as the existing PV module's mounting systems can be used to install the inverters, thus saving time and cost on site preparation and hire of plant.

The fuse and combiner free design eliminates the need for external components, such as separate DC combiner boxes and AC first level combiners, thanks to the integrated DC disconnect and AC wiring compartment with optional AC disconnect. The Advanced Cooling Concept preserves the lifetime of the system and minimizes O&M costs thanks to internal heavy-duty inverter cooling fans. These can be easily removed during scheduled maintenance cycles whilst the power module can be easily replaced without removing the wiring box.

Advanced communication for O&M

Standard wireless access from any mobile device makes the configuration of inverter and plant easier

The PVS-175-TL is ABB's innovative three-phase string inverter, delivering a six-in-one solution to enhance and optimize solar power generation for ground mounted utility scale applications.

and faster. Improved user experience thanks to a built-in User Interface (UI) enables access to advanced inverter configuration settings. The Installer for Solar Inverters mobile APP and configuration wizard enable a quick multi-inverter installation and commissioning thus reducing the time spent on site.

Fast system integration

Industry standard Modbus (RTU/TCP)/SUNSPEC protocol enables fast system integration. Two Ethernet ports enable fast and future-proof communication for PV plants.

Protect your assets

Monitoring your assets is made easy, as every inverter is capable to connect to ABB cloud platform and thanks to the state-of-the-art cybersecurity and Arc Fault Detection option, your assets and profitability are secure in the long term.

Highlights

- Up to 185 kW power rating, highest in class
- All-in-one combiner and fuse free design
- Separate power module and wiring compartment for fast swap and replacement
- Easy access to consumables for fast inspection and replacement
- 12 MPPT and wide input voltage range for maximum energy yield
- Wi-Fi interface for commissioning and configuration
- Remote monitoring and firmware upgrade via ABB cloud platform (logger free)
- Free of charge standard access to Aurora Vision® cloud

ABB string inverters

PVS-175-TL


*Preliminary



Technical data and types

Type code	PVS-175-TL
Input side	
Absolute maximum DC input voltage ($V_{max,abs}$)	1500 V
Start-up DC input voltage (V_{start})	650 V (650...1000 V)
Operating DC input voltage range ($V_{dcmin}...V_{dcmax}$)	0.7 x V_{start} ...1500 V (min 600 V)
Rated DC input voltage (V_{dcr})	1250 V
Rated DC input power (P_{dcr})	188 000 W @ 30°C (177 kW @ 40°C)
Number of independent MPPT	12
MPPT input DC voltage range ($V_{MPPTmin}...V_{MPPTmax}$) at P_{acr}	850..1350 V
Maximum DC input current for each MPPT ($I_{MPPTmax}$)	22 A
Maximum input short circuit current for each MPPT (I_{scmax})	30 A
Number of DC input pairs for each MPPT	2 DC inputs per MPPT
DC connection type	PV quick fit connector ²⁾
Input protection	
DC Series Arc Fault Circuit Interrupter	Type I acc. to UL 1699B ²⁾ with single-MPPT sensing capability
Reverse polarity protection	Yes, from limited current source
Input over voltage protection for each MPPT - varistor	Yes, 2 (S/S2 version only)
Input over voltage protection for each MPPT - replaceable surge arrester	Type 2 with monitoring (SX/SX2 version only)
Photovoltaic array isolation control (insulation resistance)	Yes, acc. to IEC 62109-2
Residual Current Monitoring Unit (leakage current protection)	Yes, acc. to IEC 62109-2
DC Load Breaking Disconnect Switch (rating for each MPPT)	32A/1500 V
Fuse rating	N/A, No fuses
String current monitoring	MPPT-level current sense
Output side	
AC Grid connection type	Three phase 3W+PE
Rated AC power ($P_{acr}@cos\phi=1$)	175 000 W @ 40°C
Maximum AC output power ($P_{acmax}@cos\phi=1$)	185 000 W @ $\leq 30^\circ\text{C}$
Maximum apparent power (S_{max})	185 000 VA
Rated AC grid voltage ($V_{acr,r}$)	800 V
AC voltage range	(552...960) ³⁾
Maximum AC output current ($I_{ac,max}$)	134 A
Rated output frequency (f_r)	50 Hz/60 Hz
Output frequency range ($f_{min}...f_{max}$)	45...55 Hz/55...65 Hz ³⁾
Nominal power factor and adjustable range	> 0.995, 0...1 inductive/capacitive with maximum S_{max}
Total current harmonic distortion	< 3%
Max DC current injection (% of I_n)	< 0.5% I_n
Maximum AC Cable / multi core	3x185mm ² copper/aluminum (cable gland M63, max cable dia. 53mm)
Maximum AC Cable / single core	4x1x185mm ² copper/aluminum (cable gland M40, max cable dia. 28mm)
AC connection type	Copper Busbar for lug connections with M10 bolts (included)
Output protection	
Anti-islanding protection	According to local standard
Maximum external AC overcurrent protection	200 A
Output overvoltage protection - replaceable surge protection device	Type 2 with monitoring
Operating performance	
Maximum efficiency (η_{max})	98.9%
Weighted efficiency (EURO/CEC)	98.6%
Communication	
Embedded communication interfaces	Dual port Ethernet, Wi-Fi ⁴⁾ , RS-485
User interface	4 LEDs, Web User Interface, Mobile APP
Communication protocol	Modbus RTU/TCP (Sunspec)
Commissioning tool	Web User Interface, Mobile APP/APP for plant level
Monitoring	Plant Portfolio Manager, Plant Viewer

ABB PVS-175-TL string inverter block diagram

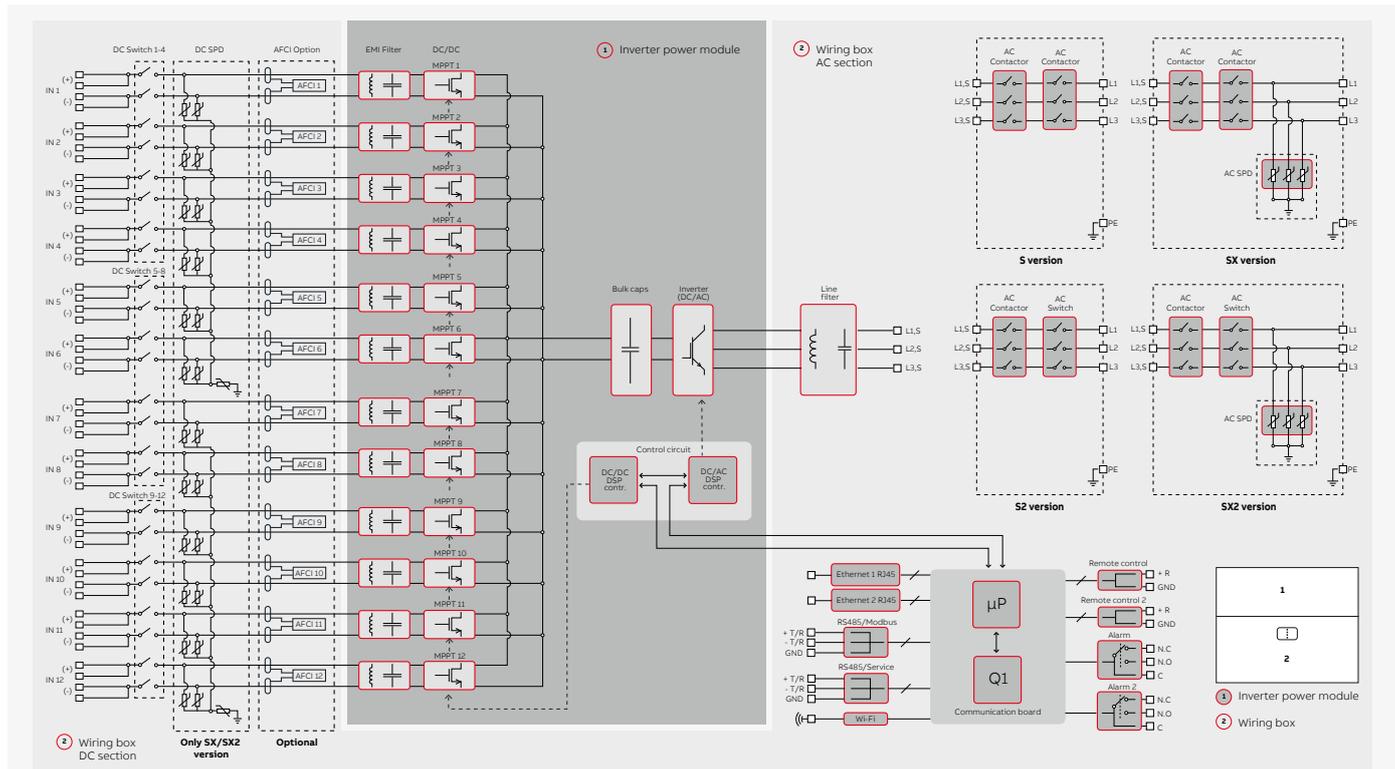

Technical data and types

Type code	PVS-175-TL
FW update	Remote inverter FW (all components) upgrade via Ethernet/Wi-Fi interface locally/remotely
Parameter upgrade	Remote inverter parameter (all components) upgrade via Ethernet/Wi-Fi interface locally/remotely
Environmental	
Operating ambient temperature range	-25...+60°C/-13...140°F with derating above 40°C/133 °F
Relative humidity	4%...100% condensing
Sound pressure level, typical	65dB(A) @ 1m
Maximum operating altitude without derating	2000 m / 6560 ft
Physical	
Environmental protection rating	IP 65 (IP54 for cooling section)
Cooling	Forced air
Dimension (H x W x D)	869x1086x419 mm/34.2" x 42.8" x 16.5"
Weight	~70kg/154 lbs for power module ~75kg/165 lbs for wiring box Overall 145 kg/319 lbs
Mounting system	Mounting bracket (vertical support only)
Safety	
Isolation level	Transformerless
Marking	CE
Safety and EMC standard	IEC/EN 62109-1, IEC/EN 62109-2, EN 61000-6-2, EN 61000-6-4, EN55011:2017
Grid standard (check your sales channel for availability)	TBD
Available products variants	
Inverter power module	PVS-175-TL-POWER MODULE
24 quick fit connector pairs (2 each mppt) + DC switches + DC side varistors	WB-S-PVS-175-TL
24 quick fit connector pairs (2 each mppt) + DC switches + DC side varistors + AC disconnection switch	WB-S2-PVS--175-TL
24 quick fit connector pairs (2 each mppt) + DC switches + SPD Type 2	WB-SX-PVS-175-TL
Pluggable Cartridges (DC & AC)	
24 quick fit connector pairs (2 each mppt) + DC switches + AC disconnection switch + SPD Type 2 Pluggable Cartridges (DC & AC)	WB-SX2-PVS--175-TL
Optional available	
DC Series Arc Fault Circuit Interrupter	Type I acc. to UL 1699B ³⁾ with single-MPPT sensing capability
AC Plate, Single Core Cables	Plate with 5 individual AC cable glands: 4 x M40: Ø 19...28mm, 1 x M25: Ø 10...17mm Plate with 2 individual AC cable glands: Opt.1: 1 x M63: Ø 34...45mm, 1 x M25: Ø 10...17mm Opt.2: 1 x M63: Ø 37...53mm, 1 x M25: Ø 10...17mm
AC Plate, Multi Core Cables	
DC link recharge circuit	Night time operation with restart capability
Anti-PID ⁵⁾	Based on night time polarization of the array

1) Multicontact MC4-Evo2. Cable couplers may accept up to 10mm² (AWG8)

2) Performance in line with the relevant requirements of the Draft IEC 63027 standard

3) The AC voltage and frequency range may vary depending on specific country grid standard

4) as per IEEE 802.11 b/g/n standard, 2.4 GHz

5) Cannot operate simultaneously when installed in conjunction with the DC link recharge circuit

For more information please contact
your local ABB representative or visit:

www.abb.com/solarinverters
www.abb.com

We reserve the right to make technical
changes or modify the contents of this
document without prior notice. With
regard to purchase orders, the agreed
particulars shall prevail. ABB AG does not
accept any responsibility whatsoever for
potential errors or possible lack of
information in this document.

We reserve all rights in this document and
in the subject matter and illustrations
contained therein. Any reproduction,
disclosure to third parties or utilization of
its contents – in whole or in parts – is
forbidden without prior written consent of
ABB AG. Copyright© 2017 ABB
All rights reserved

